

Product Data Sheet

SF140-L

SF145-L

SF150-L

SF155-L




Next Generation CIS

Solar Frontier's new SF140–155 module series offers the highest conversion efficiency of any mass-produced thin-film module, up to 12.6%. The modules feature the light-soaking effect unique to Solar Frontier's CIS technology, which provides higher output than initially specified. All modules are RoHS compliant and cadmium- and lead-free. Fewer production steps and raw materials also mean an industry-leading energy payback time of less than one year. SF140–155 modules are shipped in cardboard-free packaging and use recyclable corner pieces.

Product & Technology Highlights

- Highest efficiency mass-production thin-film module, up to 12.6%
- World record 17.2% achieved in laboratory (30 cm x 30 cm module)
- Up to 10% extra kWh/kWp vs crystalline modules
- Light soaking effect boosts output after installation
- Over 100 MW delivered since 2007
- Based on proprietary R&D since 1978
- Cadmium and lead free
- Energy Payback Time under one year

I-V Curve

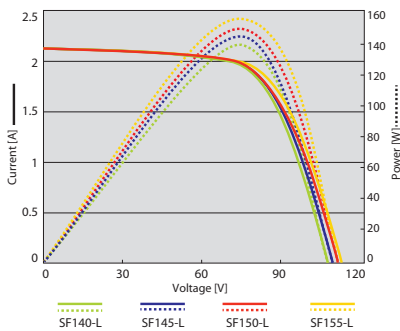

Certificates and Compliance*




RoHS
compliant

IEC
61646
61730
certified

* IEC/TUV/UL certifications for SF155-L modules are pending.

Module Drawing

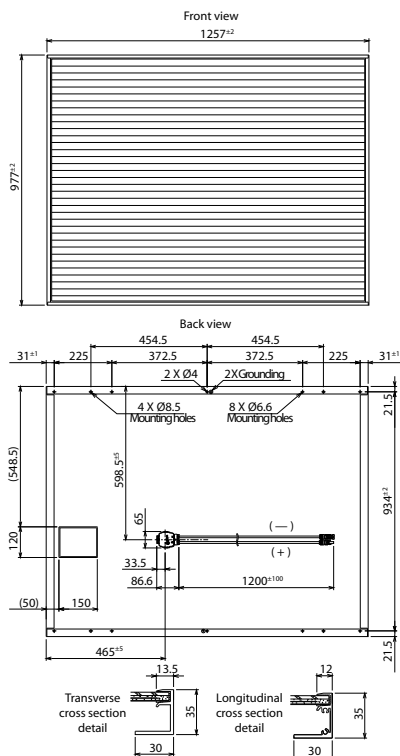

Contact Information

Solar Frontier K.K.
(HQ, Asian Sales Office)
Tokyo, Japan
Tel: +81-3-5531-5626

Solar Frontier Americas
Santa Clara, CA, USA
Tel: +1-408-916-4150

Solar Frontier Europe
Munich, Germany
Tel: +49-89-92-86-142-22

www.solar-frontier.com

STC Characteristics

| | | SF140-L | SF145-L | SF150-L | SF155-L |
|-------------------------------|------------------|----------|---------|---------|---------|
| Maximum power | P _{max} | 140 W | 145 W | 150 W | 155 W |
| Module efficiency | % | 11.4% | 11.8% | 12.2% | 12.6% |
| Tolerance of P _{max} | | +10%/-5% | | | |
| Factory binning | | ±2.5 W | ±2.5 W | ±2.5 W | ±2.5 W |
| Open circuit voltage | V _{oc} | 109.0 V | 110.0 V | 110.0 V | 108.0 V |
| Short circuit current | I _{sc} | 2.10 A | 2.10 A | 2.10 A | 2.20 A |
| Voltage at maximum power | V _{mpp} | 77.0 V | 78.0 V | 79.0 V | 80.0 V |
| Current at maximum power | I _{mpp} | 1.82 A | 1.86 A | 1.90 A | 1.95 A |

Standard Test Conditions (STC): 1,000 W/m² irradiance, module temperature 25 °C, air mass 1.5. I_{sc} and V_{oc} are ±10% tolerance of STC rated values. Module output may rise after light soaking due to its unique characteristics.

NOCT Characteristics

| | | SF140-L | SF145-L | SF150-L | SF155-L |
|--------------------------|------------------|---------|---------|---------|---------|
| Maximum power | P _{max} | 102 W | 106 W | 109 W | 113 W |
| Open circuit voltage | V _{oc} | 97.8 V | 98.7 V | 98.7 V | 96.9 V |
| Short circuit current | I _{sc} | 1.66 A | 1.66 A | 1.66 A | 1.74 A |
| Voltage at maximum power | V _{mpp} | 72.7 V | 73.6 V | 74.5 V | 75.5 V |
| Current at maximum power | I _{mpp} | 1.41 A | 1.44 A | 1.47 A | 1.50 A |

Nominal Operating Cell Temperature Conditions: Module operating temperature at 800 W/m² irradiance, air temperature 20 °C, wind speed 1 m/s and open circuit condition.

Performance at Low Irradiance

Efficiency reduction of maximum power from an irradiance of 1,000 W/m² to 200 W/m² at 25 °C is typically 3.0%. The standard deviation for the reduction of efficiency is 2.6%.

Temperature Characteristics

| NOCT | | 47 °C |
|---|---|----------|
| Temperature coefficient of I _{sc} | α | +0.01%/K |
| Temperature coefficient of V _{oc} | β | -0.30%/K |
| Temperature coefficient of P _{max} | δ | -0.31%/K |

Mechanical Characteristics

| | |
|-------------------------------|--|
| Dimensions (L x W x H) | 1,257 x 977 x 35 mm (49.5 x 38.5 x 1.4 in.) |
| Weight | 20 kg (44.1 lbs) |
| Application class (IEC 61730) | A |
| Fire rating (IEC 61730) | Class C |
| Safety class (IEC 61140) | II |
| Snow/wind load* | 2,400 Pa (IEC 61646) / 1,600 Pa design load (UL 1703) |
| Cell type | CIS glass substrate (cadmium free) |
| Front cover | Clear tempered glass, 3.2 mm |
| Encapsulant | EVA |
| Back sheet | Weatherproof plastic film (color: black & silver) |
| Frame | Anodized aluminum alloy (color: black) |
| Edge sealant | Butyl rubber |
| Junction box | Protection rating: IP 67 (with bypass diode) |
| Adhesive | Silicone |
| Output cables (conductor) | 2.5 mm ² / 14 AWG (halogen free) |
| Cable lengths (symmetrical) | 1,200 mm (47.2 in.) |
| Packing information | 25 panels/pallet • 36 pallets/40' container (900 panels) |

* UL: 1.5 x design load is applied to the module, i.e. 2,400 Pa (50.1 lbs/ft²) is applied to meet the 1,600 Pa UL design load standard.

This preliminary data sheet is provided to assist you in evaluating this product that is under development. Solar Frontier K.K. reserves the right, at its sole discretion, to change, modify, add or delete portions of the content at any time without notice.